

FEATURES

- ▶ Industrial Standard 2 X 1" Package
- ▶ Wide 2:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ I/O Isolation 4200VAC with Reinforced Insulation, rated for 300Vrms Working Voltage
- ▶ Low Leakage Current < 5μA
- ▶ Operating Ambient Temp. Range -40°C to +80°C
- ▶ No Min. Load Requirement
- ▶ Overload/Voltage and Short Circuit Protection
- ▶ Designed-in EMI Emission meets EN55011 Class A & FCC Level A
- ▶ Medical EMC Standard meets 4th Edition of EMI EN55011 and EMS EN60601-1-2
- ▶ Medical Safety meets 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 (Pending) with CE Marking



PRODUCT OVERVIEW

The MINMAX MKW20M series is a new range of high performance 20W medical approved dc-dc converter within encapsulated 2"x1" package which specifically design for medical applications. There are 21 models available for input voltage of 12, 24, 48VDC with wide 2:1 input range and tight output voltage. The I/O isolation is specified for 4200VAC with reinforced insulation, which rated for 300Vrms working voltage. Further features include overload, short circuit protection, no min. load requirement, EMI conduction meets EN55011 Class A, low leakage current 5μ A max. and operating ambient temp. range by -40°C to 80°C by high efficiency up to 90%. MKW20M series conform to 4th edition medical EMC standard, medical safety approval meets 2xMOPP (Means Of Patient Protection) per 3rd edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1.

The MKW20M series offer a economical solution for demanding application in medical instrument requesting a certified supplementary and reinforced insulation system to comply with latest medical safety approval for 2xMOPP requirement.

Model Selection Guide

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current			Input Current	Reflected Ripple Current mA(typ.)	Over Voltage Protection VDC	Max. capacitive Load μ F	Efficiency (typ.)		
			Max. mA	@Max. Load mA(typ.)	@No Load mA (typ.)					@Max. Load	%	
MKW20-12S05M	12 (9 ~ 18)	5	4000	1938	20	100	6.2	6800	86			
MKW20-12S051M		5.1	4000	1977			6.2				86	
MKW20-12S12M		12	1670	1876			15				89	
MKW20-12S15M		15	1333	1893			18				88	
MKW20-12S24M		24	840	1888			27				89	
MKW20-12D12M		±12	±840	1888			±15				590#	89
MKW20-12D15M		±15	±670	1882			±18				380#	89
MKW20-24S05M	24 (18 ~ 36)	5	4000	947	15	50	6.2	6800	88			
MKW20-24S051M		5.1	4000	966			6.2				88	
MKW20-24S12M		12	1670	938			15				89	
MKW20-24S15M		15	1333	936			18				89	
MKW20-24S24M		24	840	933			27				90	
MKW20-24D12M		±12	±840	933			±15				590#	90
MKW20-24D15M		±15	±670	931			±18				380#	90
MKW20-48S05M	48 (36 ~ 75)	5	4000	473	10	30	6.2	6800	88			
MKW20-48S051M		5.1	4000	483			6.2				88	
MKW20-48S12M		12	1670	469			15				89	
MKW20-48S15M		15	1333	463			18				90	
MKW20-48S24M		24	840	472			27				89	
MKW20-48D12M		±12	±840	472			±15				590#	89
MKW20-48D15M		±15	±670	465			±18				380#	90

For each output

Input Specifications							
Parameter	Conditions/Model	Min.	Typ.	Max.	Unit		
Input Surge Voltage (100 ms max.)	12V Input Models	-0.7	---	25	VDC		
	24V Input Models	-0.7	---	50			
	48V Input Models	-0.7	---	100			
Start-Up Threshold Voltage	12V Input Models	---	---	9			
	24V Input Models	---	---	18			
	48V Input Models	---	---	36			
Under Voltage Shutdown	12V Input Models	---	7.5	---			
	24V Input Models	---	15	---			
	48V Input Models	---	33	---			
Start Up Time (Power On)	Nominal Vin and Constant Resistive Load	---	---	30	ms		
Input Filter	All Models	Internal Pi Type					

Output Specifications							
Parameter	Conditions/Model	Min.	Typ.	Max.	Unit		
Output Voltage Setting Accuracy		---	---	±1.0	%Vnom.		
Output Voltage Balance	Dual Output, Balanced Loads	---	---	±2.0	%		
Line Regulation	Vin=Min. to Max. @Full Load	---	---	±0.5	%		
Load Regulation	Io=0% to 100%	Single Output	---	---	±0.5	%	
		Dual Output	---	---	±1.0	%	
Minimum Load	No minimum Load Requirement						
Ripple & Noise	0-20 MHz Bandwidth	5V & 5.1Vo	Measured with a MLCC : 4.7μ F	---	50	---	mV _{P-P}
		12V,15V, ±12V, ±15Vo		---	100	---	mV _{P-P}
		24Vo		---	150	---	mV _{P-P}
Transient Recovery Time	25% Load Step Change ₍₂₎	---	---	300	μsec		
Transient Response Deviation		---	±3	±5	%		
Temperature Coefficient		---	---	±0.02	%/°C		
Over Load Protection	Hiccup	---	150	---	%		
Short Circuit Protection	Hiccup Mode 0.7 Hz typ., Automatic Recovery						

Isolation, Safety Standards						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
I/O Isolation Voltage	60 Seconds Reinforced insulation, rated for 300Vrms working voltage	4200	---	---	VACrms	
Leakage Current	240VAC, 60Hz	---	---	5	μ A	
I/O Isolation Resistance	500 VDC	10	---	---	GΩ	
I/O Isolation Capacitance	100KHz, 1V	---	---	80	pF	
Safety Standards	ANSI/AAMI ES60601-1, CAN/CSA-C22.2 No. 60601-1 IEC/EN 60601-1 3 rd Edition 2xMOPP					
Safety Approvals (Pending)	ANSI/AAMI ES60601-1 2xMOPP recognition (UL certificate), IEC/EN 60601-1 3 rd Edition (CB-report)					





General Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
Switching Frequency		---	285	---	KHz	
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,087,344	---	---	Hours	

Environmental Specifications

Parameter	Conditions/Model	Min.	Max.	Unit
Operating Ambient Temperature Range Natural Convection (6) Nominal Vin, Load 100% Inom. (for Power Derating see relative Derating Curves)	MKW20-24S24M, MKW20-24D12M, MKW20-24D15M MKW20-48S15M, MKW20-48D15M	-40	66	°C
	MKW20-12S12M, MKW20-12S24M, MKW20-12D12M MKW20-12D15M, MKW20-24S12M, MKW20-24S15M MKW20-48S12M, MKW20-48S24M, MKW20-48D12M		62	
	MKW20-12S15M, MKW20-24S05M, MKW20-24S051M MKW20-48S05M, MKW20-48S051M		58	
	MKW20-12S05M, MKW20-12S051M		51	
Thermal Impedance	Natural Convection	13.0	---	°C/W
Case Temperature		---	+95	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Altitude		---	4000	M
Cooling	Natural Convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C


EMC Specifications

Parameter	Standards & Level		Performance
EMI	Conduction & Radiation	EN55011, FCC part 15	Class A
EMS	EN60601-1-2 4 th		
	ESD	EN61000-4-2 Air ± 15kV , Contact ± 8kV	A
	Radiated immunity	EN61000-4-3 10V/m	A
	Fast transient (5)	EN61000-4-4 ±2kV	A
	Surge (5)	EN61000-4-5 ±1kV	A
	Conducted immunity	EN61000-4-6 10Vrms	A
	PFMF	EN61000-4-8 30A/M	A

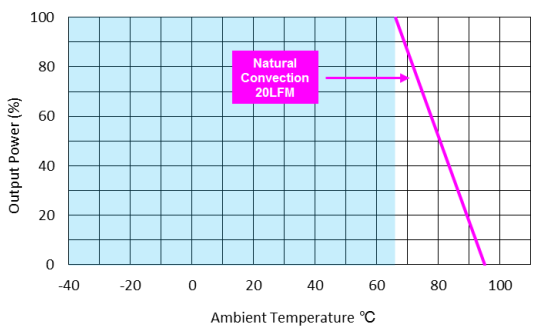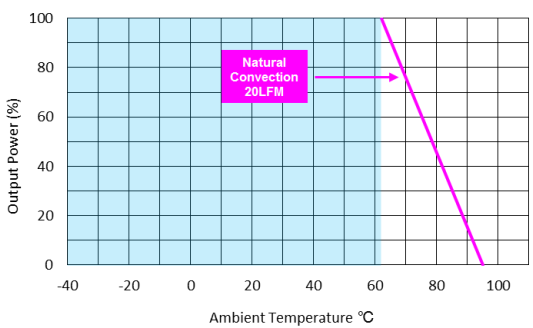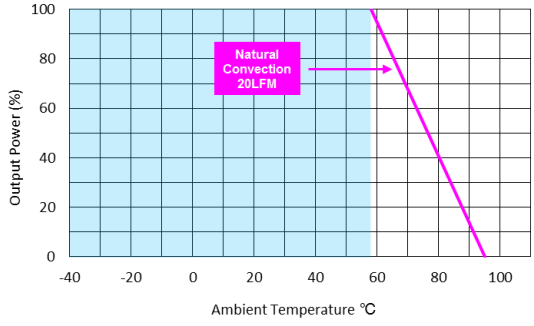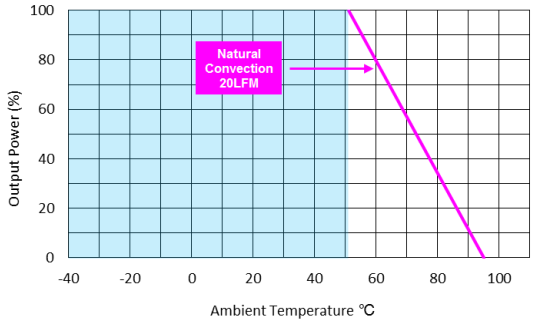Power Derating Curve	
	
MKW20-24S24M, MKW20-24D12M, MKW20-24D15M MKW20-48S15M, MKW20-48D15M	MKW20-12S12M, MKW20-12S24M, MKW20-12D12M, MKW20-12D15M MKW20-24S12M, MKW20-24S15M, MKW20-48S12M, MKW20-48S24M MKW20-48D12M
	
MKW20-12S15M, MKW20-24S05M, MKW20-24S051M, MKW20-48S05M MKW20-48S051M	MKW20-12S05M, MKW20-12S051M

Notes

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact factory.
- 5 To meet EN61000-4-4 & EN61000-4-5 an external capacitor across the input pins is required. Suggested capacitor : 330µ F/100V.
- 6 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 7 Specifications are subject to change without notice.

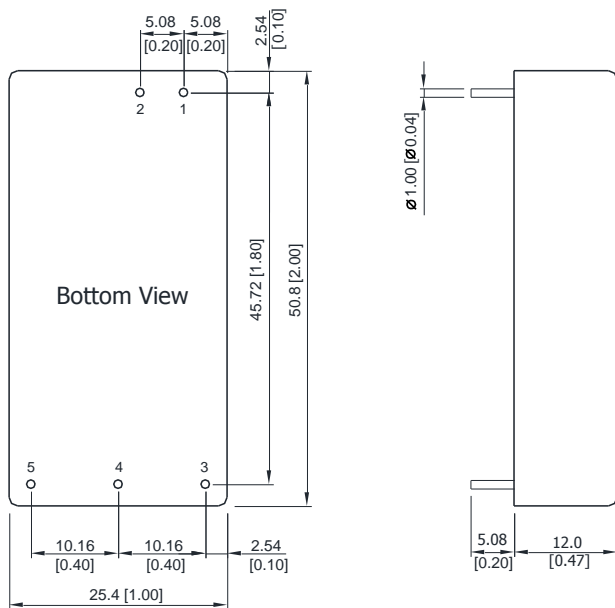
Package Specifications																			
<div style="border: 1px solid #ccc; padding: 5px;"> <p>Mechanical Dimensions</p>  <p style="text-align: center;">Bottom View</p> </div>	<div style="border: 1px solid #ccc; padding: 5px;"> <p>Pin Connections</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th style="width: 15%;">Pin</th> <th style="width: 35%;">Single Output</th> <th style="width: 50%;">Dual Output</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+Vin</td> <td>+Vin</td> </tr> <tr> <td>2</td> <td>-Vin</td> <td>-Vin</td> </tr> <tr> <td>3</td> <td>+Vout</td> <td>+Vout</td> </tr> <tr> <td>4</td> <td>No Pin</td> <td>Common</td> </tr> <tr> <td>5</td> <td>-Vout</td> <td>-Vout</td> </tr> </tbody> </table> <p style="font-size: small; margin-top: 10px;"> ▶ All dimensions in mm (inches) ▶ Tolerance: X.X±0.5 (X.XX±0.02) X.XX±0.25 (X.XXX±0.01) ▶ Pin diameter $\varnothing 1.0 \pm 0.05$ (0.04±0.002) </p> </div>	Pin	Single Output	Dual Output	1	+Vin	+Vin	2	-Vin	-Vin	3	+Vout	+Vout	4	No Pin	Common	5	-Vout	-Vout
Pin	Single Output	Dual Output																	
1	+Vin	+Vin																	
2	-Vin	-Vin																	
3	+Vout	+Vout																	
4	No Pin	Common																	
5	-Vout	-Vout																	

Physical Characteristics	
Case Size	: 50.8x25.4x12.0mm (2.0x1.0x0.47 inches)
Case Material	: Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Pin Material	: Tinned Copper
Weight	: 30g

Test Setup



Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} ($4.7\mu H$) and C_{in} ($220\mu F$, $ESR < 1.0\Omega$ at 100 KHz) to simulate source impedance. Capacitor C_{in} , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

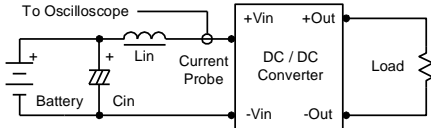

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} $4.7\mu F$ ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

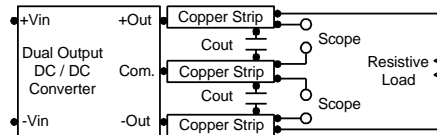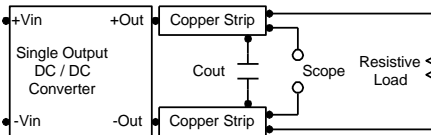

Technical Notes

Overload Protection


To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.



Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor on the input to insure startup. By using a good quality low Equivalent Series Resistance ($ESR < 1.0\Omega$ at 100 kHz) capacitor of a $10\mu F$ for the 12V input devices and a $4.7\mu F$ for the 24V input devices and a $2.2\mu F$ for the 48V devices, capacitor mounted close to the power module helps ensure stability of the unit.

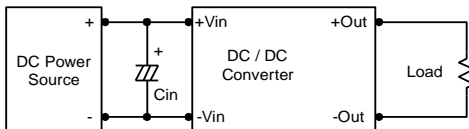

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use $4.7\mu F$ capacitors at the output.

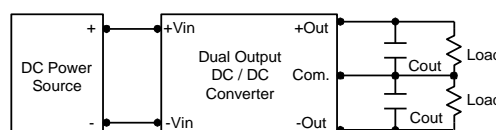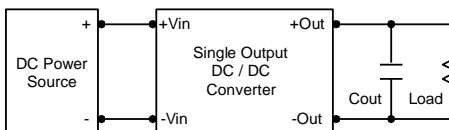

Maximum Capacitive Load

The MKW20M series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. Connect capacitors at the point of load for best performance. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below $95^{\circ}C$. The derating curves are determined from measurements obtained in a test setup.

